

**Qwest® Wireless USB Adapter:
2Wire® 802.11g**


How to Configure the Adapter

Before you begin:

- Confirm your Qwest® Advanced Networking Modem with Wireless: 2-Wire® 2700 HG is installed.
- Confirm your adapter is installed (separate instructions available).
- Confirm the appropriate adapter driver software is installed (separate instructions available).

Now, you're ready to configure your adapter to work with your wireless modem.

A wireless network requires a network name (SSID) and an encryption key to operate. Every Qwest Advanced Networking Modem with Wireless: 2-Wire 2700 HG comes with a unique network name and encryption key printed on the bottom of the unit.

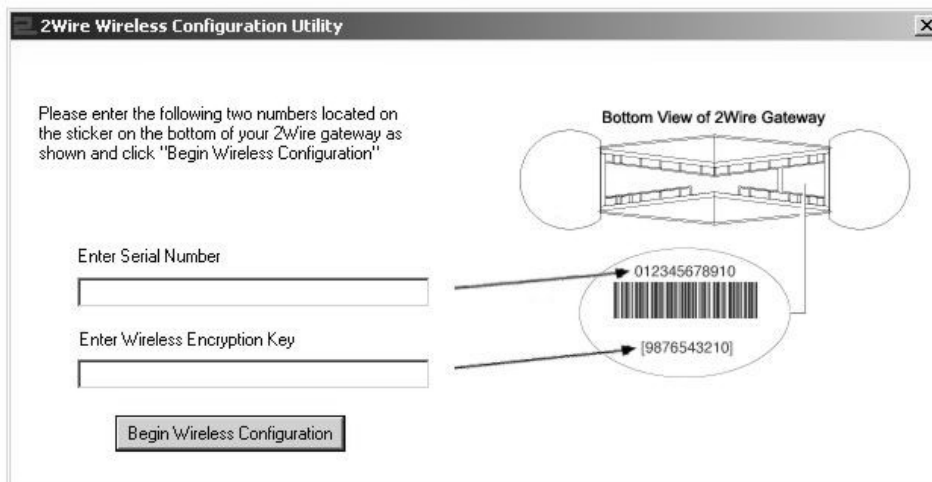

1. Insert the Qwest Advanced Networking Modem with Wireless: 2-Wire 2700 HG installation CD in your computer CD-ROM drive.
2. From the Windows "Start" button, select **Run**.
3. In the "Open" field, type **D:\setup.exe**. Then, select **OK**.

Note: If your CD-ROM drive is not located on drive D:, substitute the appropriate letter (e.g., E:\setup.exe).

4. When the "Driver and Utilities Program" page displays, select the **Configure 2Wire Wireless Adapter** button.



5. Enter the serial number and encryption key for your Qwest Advanced Networking Modem with Wireless: 2-Wire 2700 HG.
6. Select the **Begin Wireless Configuration** button to configure your adapter.