



Qwest® Standard Modem: Actiontec® GT701

How to Restore Factory Default Settings


You may have a need to reset your Qwest® Standard Modem: Actiontec® GT701 to the factory default settings.

If you've set an administrative password and cannot access your Qwest Standard Modem: Actiontec GT701, you can restore factory defaults by:


- Depressing the reset button for ten seconds until the power light turns an “amber” color.
- After the “amber” light appears, release the reset button to reboot the Qwest Standard Modem: Actiontec GT701.
- You now have access to the Web home page and can reconfigure your Qwest Standard Modem: Actiontec GT701, as instructed by your Internet Service Provider (ISP).

If you have your administrative password and can access your Qwest Standard Modem: Actiontec GT701, follow the instructions below.

1. Enter "192.168.0.1" in the Address bar of your Internet browser, which automatically opens the "General Status" page. Select the **Utilities** tab.

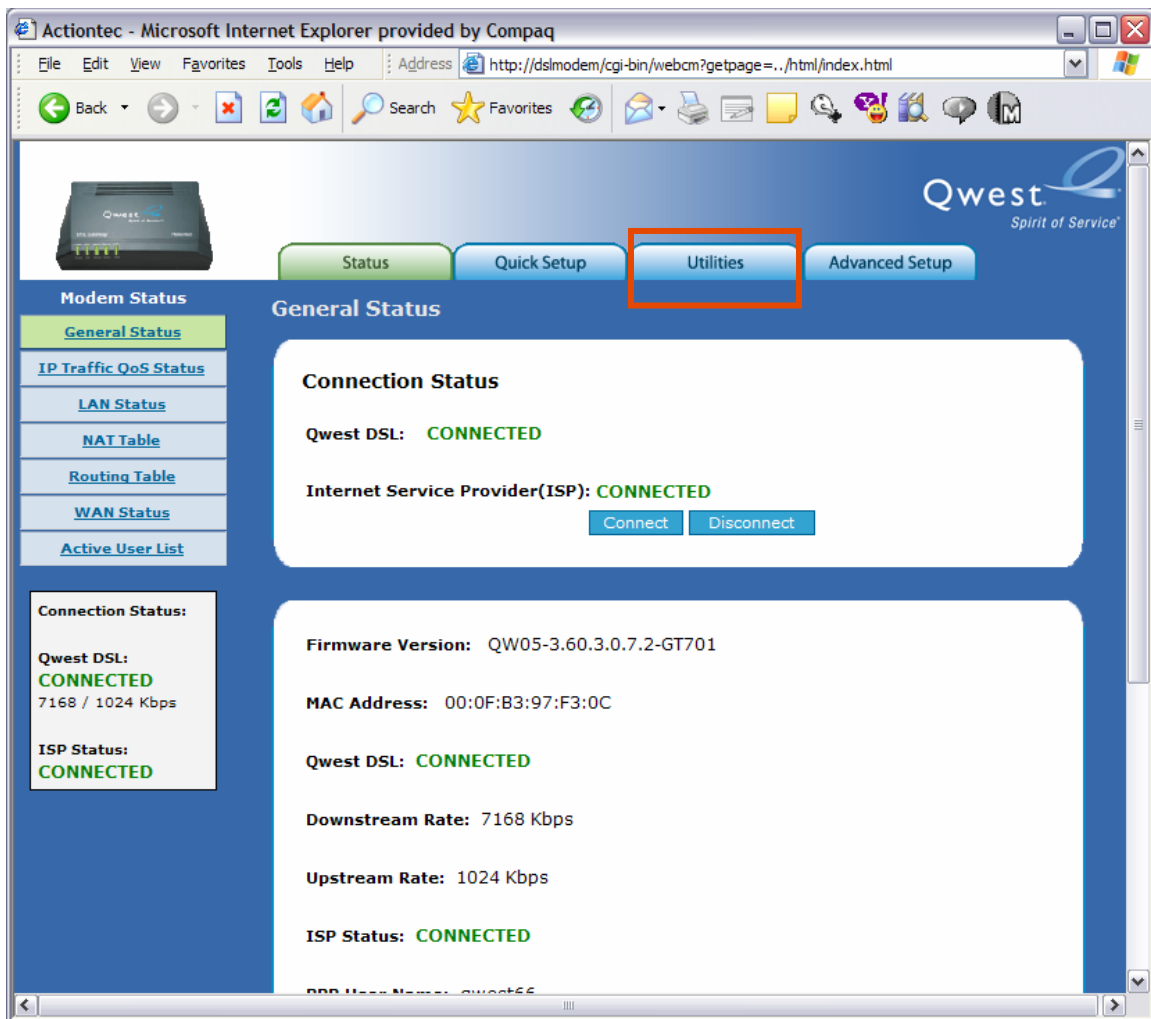


2. Scroll down and select the **Restore Default Settings** link.

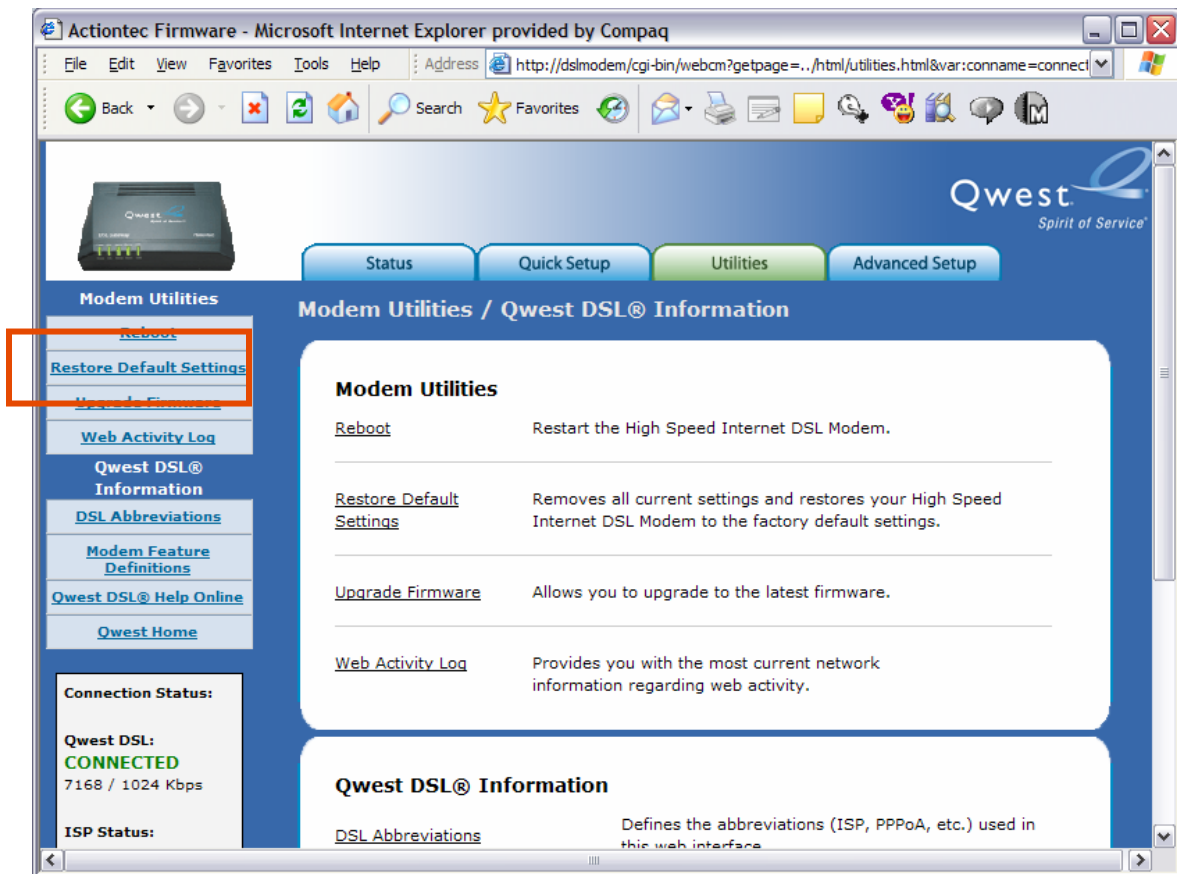


3. Select the **Restore Default Settings** button.

Warning:

Selecting the **Restore Default Settings** button deletes all configurations of the Qwest Standard Modem: Actiontec GT701. You have no Internet access until the Qwest Standard Modem: Actiontec GT701 is reconfigured to work with your selected ISP.

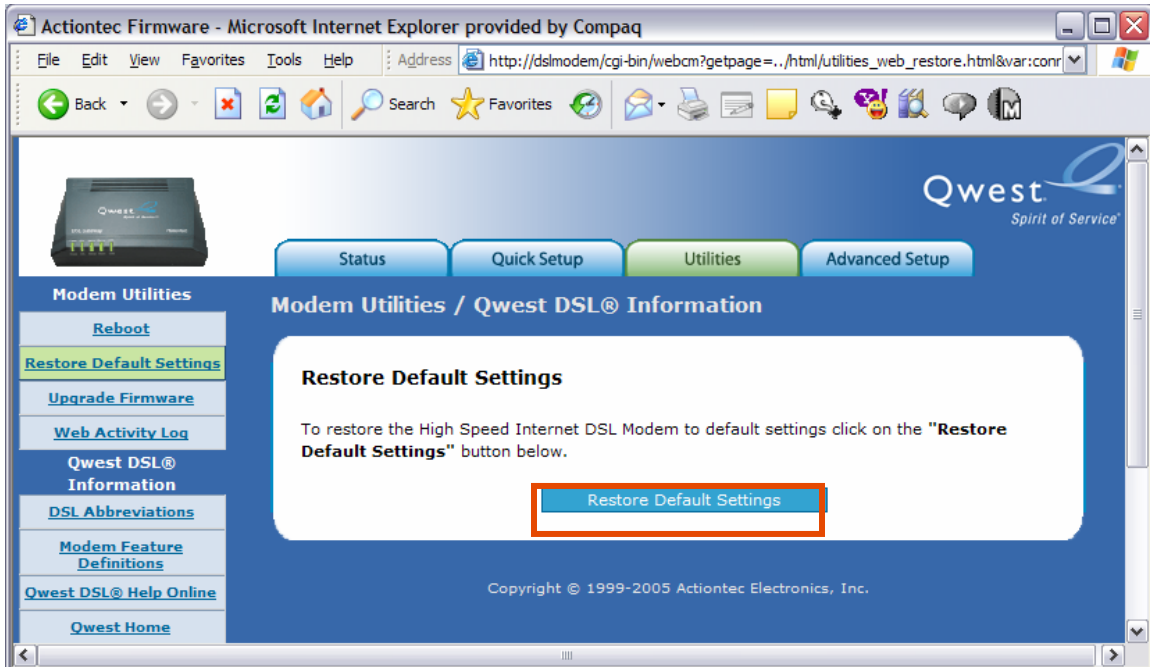

4. Select the **OK** button to restore factory defaults to your Qwest Standard Modem: Actiontec GT701.

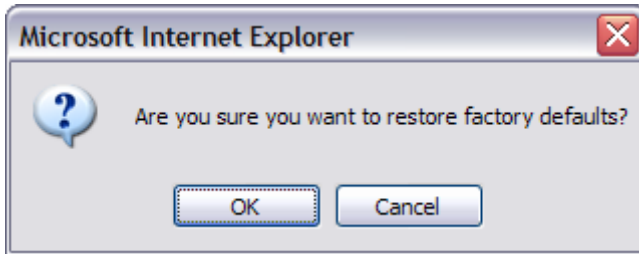

5. When the power and DSL lights are solid green, select the **Here** link.

You will be redirected automatically to the "Quick Setup" page.

From this page, you'll need to reprogram your Qwest Standard Modem: Actiontec GT701.

